

## การ Restore to Default


ผู้ใช้สามารถทำการ Restore to Default ได้ 2 วิธี คือ แบบ Hardware และแบบ Software โดยทั้งสองวิธีให้ผลการทำงานในแบบเดียวกัน

### แบบ Hardware


- กดปุ่ม **Reset** ที่อยู่บริเวณด้านหลังของตัว Access Point ค้างไว้จนกว่า ไฟ POWER จะกระพริบ

### แบบ Software

- เปิด Browser พิมพ์ **192.168.1.2** ในช่อง Address แล้วกด **Enter**



- ใส่ Username: **admin** และ Password: **aisadmin** แล้วกด **Login**

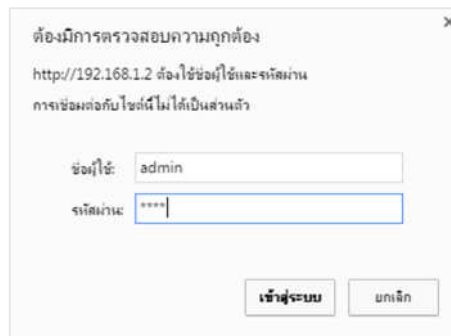


ต้องการตรวจสอบความถูกต้อง  
http://192.168.1.2 ต้องใช้ชื่อผู้ใช้และรหัสผ่าน  
การเชื่อมต่อกับ โฮสต์นี้ไม่ได้เป็นส่วนแล้ว

ชื่อผู้ใช้:

รหัสผ่าน:

- หลังจากที่ Login แล้ว จะเข้าสู่หน้า Setup

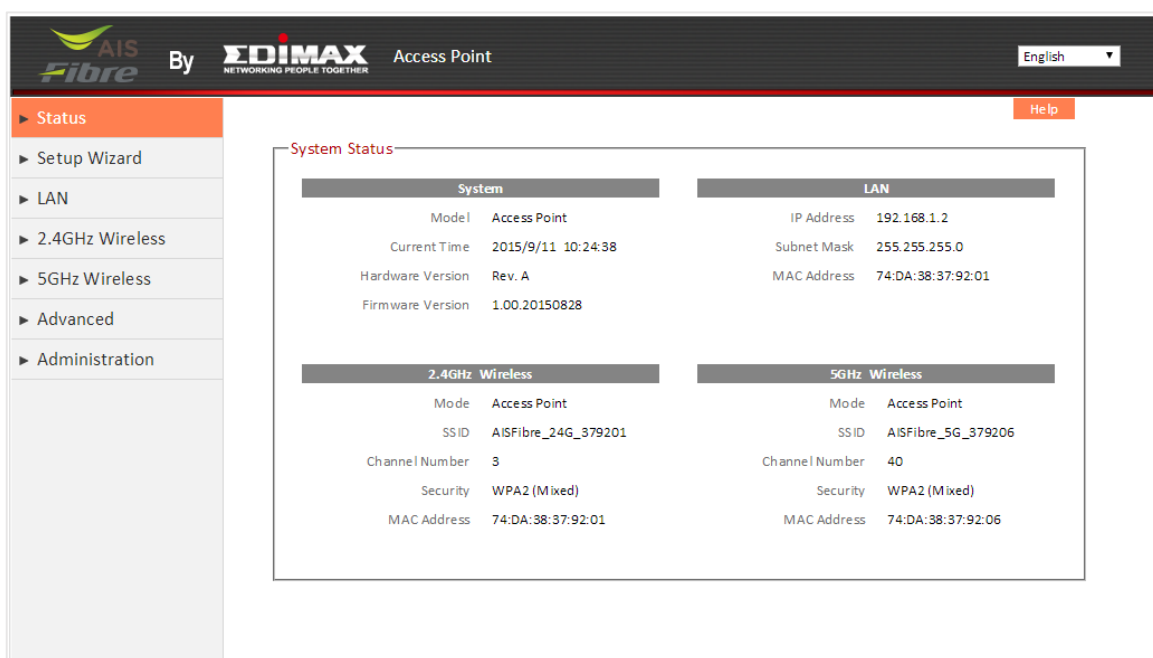

AIS Fibre By EDIMAX Access Point

English

Help

► Status

► Setup Wizard

► LAN

► 2.4GHz Wireless

► 5GHz Wireless

► Advanced

► Administration


### System Status

System		LAN	
Model	Access Point	IP Address	192.168.1.2
Current Time	2015/9/11 10:24:38	Subnet Mask	255.255.255.0
Hardware Version	Rev. A	MAC Address	74:DA:38:37:92:01
Firmware Version	1.00.20150828		

2.4GHz Wireless		5GHz Wireless	
Mode	Access Point	Mode	Access Point
SSID	AISFibre_24G_379201	SSID	AISFibre_5G_379206
Channel Number	3	Channel Number	40
Security	WPA2 (Mixed)	Security	WPA2 (Mixed)
MAC Address	74:DA:38:37:92:01	MAC Address	74:DA:38:37:92:06

5. จากแถบเมนูด้านซ้าย เลือก **Administration** -> **Backup/Restore**
6. ในหัวข้อ **Restore to Factory Default** กด **Reset** เพื่อเริ่มกระบวนการ

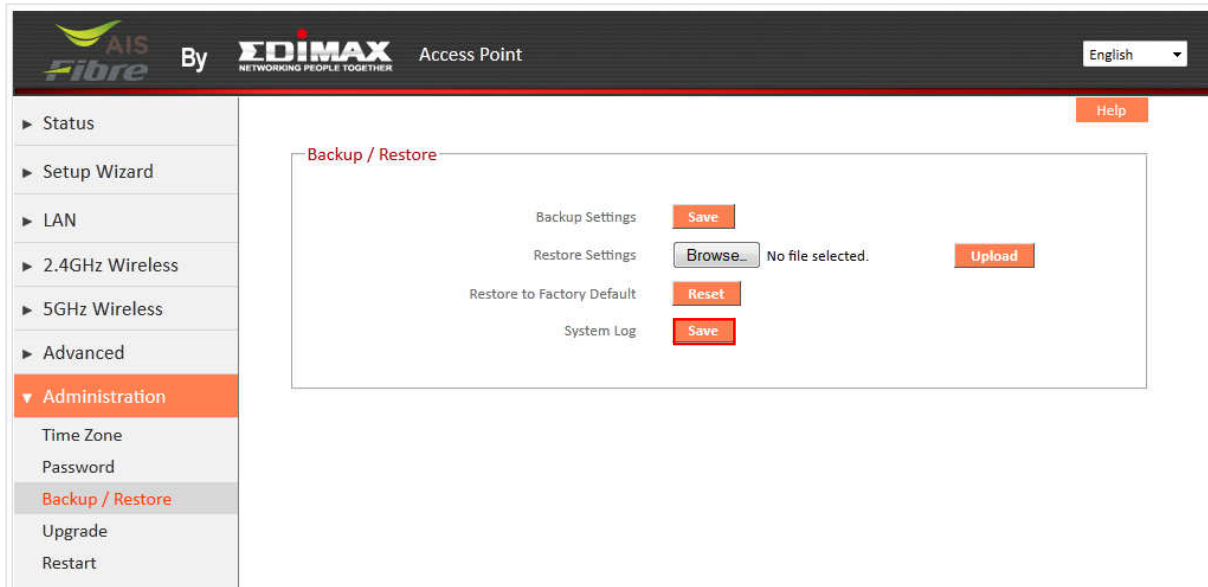

The screenshot shows the web interface for an Edimax Access Point. The top header includes the AIS Fibre logo, 'By EDIMAX NETWORKING PEOPLE TOGETHER', and 'Access Point'. A language dropdown menu is set to 'English'. A 'Help' button is located in the top right corner. On the left, a navigation menu lists various settings: Status, Setup Wizard, LAN, 2.4GHz Wireless, 5GHz Wireless, Advanced, Administration (highlighted), Time Zone, Password, Backup / Restore (highlighted), Upgrade, and Restart. The main content area is titled 'Backup / Restore' and contains four sections: 'Backup Settings' with a 'Save' button; 'Restore Settings' with a 'Browse...' button, the text 'No file selected.', and an 'Upload' button; 'Restore to Factory Default' with a 'Reset' button; and 'System Log' with a 'Save' button.