

## การ Upgrade Firmware

1. เปิด Browser พิมพ์ **192.168.1.2** ในช่อง Address แล้วกด **Enter**



2. ใส่ Username: **admin** และ Password: **aisadmin** แล้วกด **Login**


ต้องการตรวจสอบความถูกต้อง

http://192.168.1.2 ต้องใช้ชื่อผู้ใช้และรหัสผ่าน  
การเชื่อมต่อกับเซิร์ฟเวอร์ไม่ได้เป็นส่วนแล้ว

ชื่อผู้ใช้:

รหัสผ่าน:

3. หลังจากที Login แล้ว จะเข้าสู่หน้า Setup

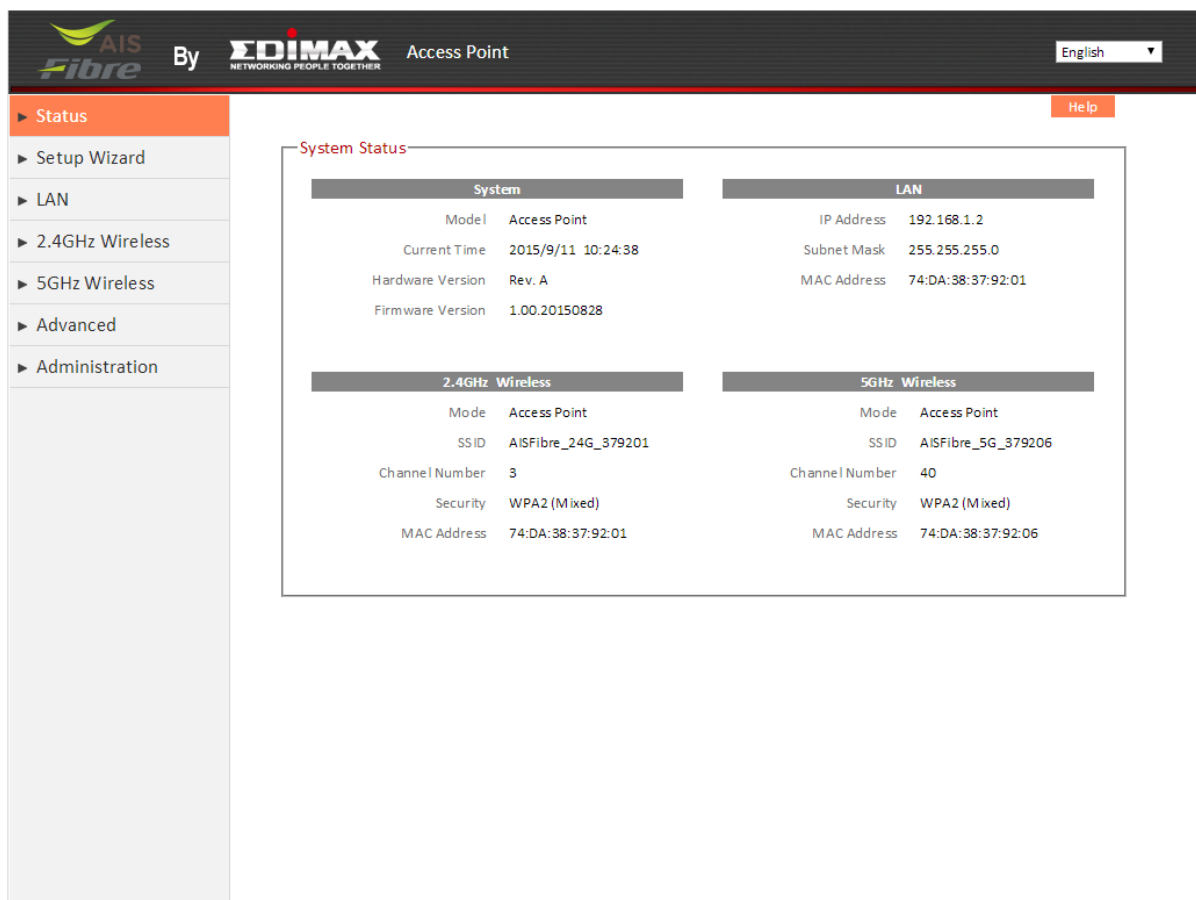


The screenshot shows the web interface of an EDIMAX Access Point. The top navigation bar includes the AIS Fibre logo, the text 'By EDIMAX NETWORKING PEOPLE TOGETHER', and 'Access Point'. A language dropdown menu is set to 'English'. A sidebar on the left contains menu items: Status (selected), Setup Wizard, LAN, 2.4GHz Wireless, 5GHz Wireless, Advanced, and Administration. The main content area displays 'System Status' with the following information:

System		LAN	
Model	Access Point	IP Address	192.168.1.2
Current Time	2015/9/11 10:24:38	Subnet Mask	255.255.255.0
Hardware Version	Rev. A	MAC Address	74:DA:38:37:92:01
Firmware Version	1.00.20150828		

2.4GHz Wireless		5GHz Wireless	
Mode	Access Point	Mode	Access Point
SSID	AISFibre_24G_379201	SSID	AISFibre_5G_379206
Channel Number	3	Channel Number	40
Security	WPA2 (Mixed)	Security	WPA2 (Mixed)
MAC Address	74:DA:38:37:92:01	MAC Address	74:DA:38:37:92:06

4. จากเมนูด้านซ้ายเลือก **Administration** -> **Upgrade**
5. กด **Browse** เพื่อเลือกที่อยู่ของไฟล์อัปเดต
6. กด **Apply** เพื่อเริ่มกระบวนการ

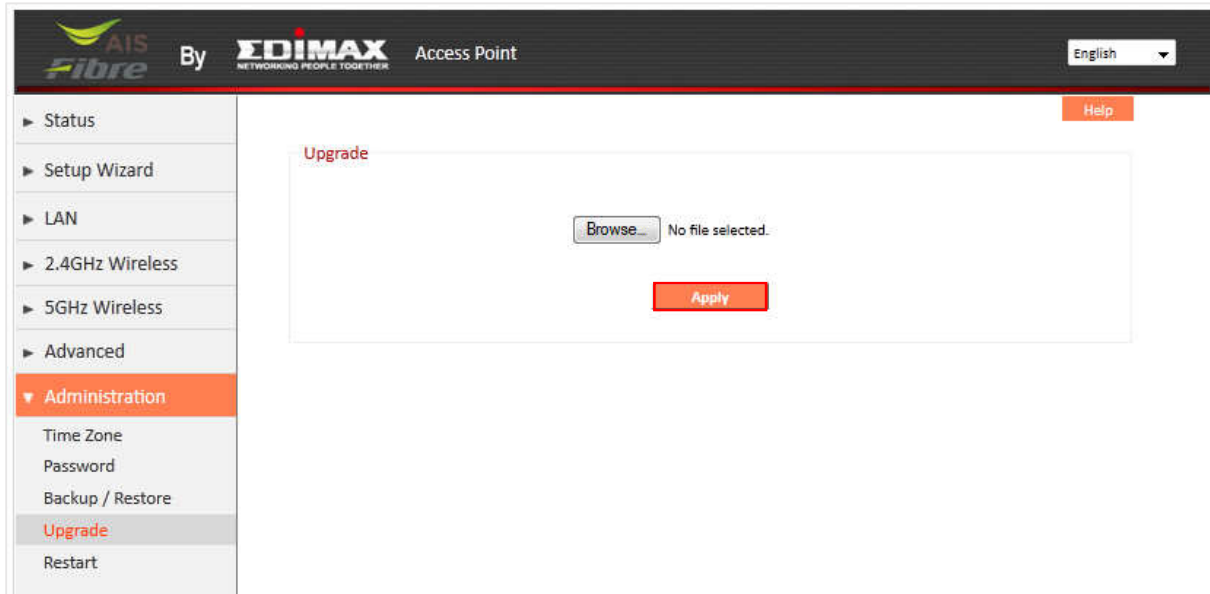

The screenshot shows the web interface for an AIS Fibre EDIMAX Access Point. The top navigation bar includes the AIS Fibre logo, the text "By EDIMAX NETWORKING PEOPLE TOGETHER", and "Access Point". A language dropdown menu is set to "English". On the left, a sidebar menu lists various configuration options, with "Administration" expanded to show "Upgrade" as the selected item. The main content area is titled "Upgrade" and contains a "Browse..." button next to the text "No file selected." and an "Apply" button.